


RF Signal Generator

SG384 — 4 GHz analog RF signal generator

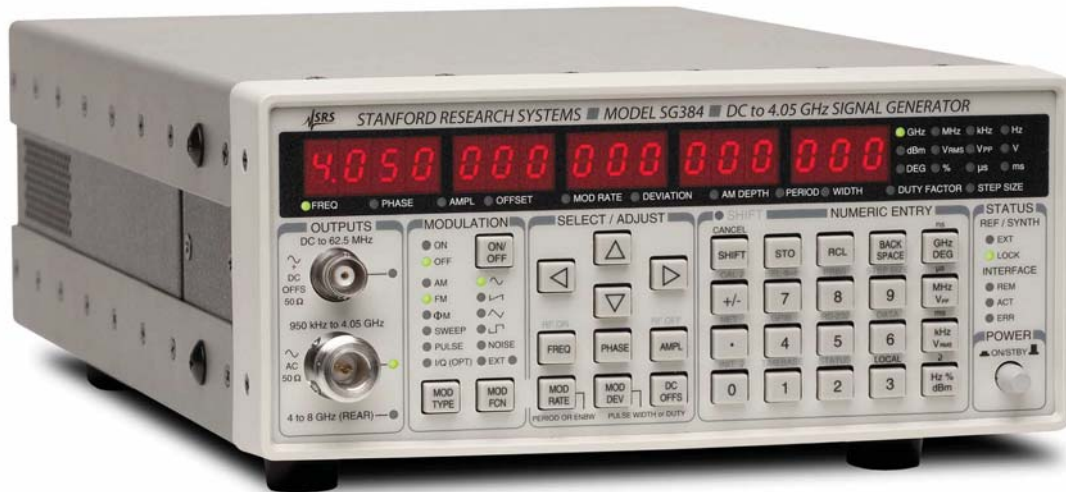

SG384 RF Signal Generator

- **DC to 4.05 GHz**
 - **1 μ Hz resolution**
 - **AM, FM, Φ M, PM and sweeps**
 - **OCXO timebase (std.)**
 - **-116 dBc/Hz SSB phase noise (20 kHz offset, $f = 1$ GHz)**
 - **Rubidium timebase (opt.)**
 - **Square wave clock outputs (opt.)**
 - **Analog I/Q inputs (opt.)**
 - **Ethernet, GPIB, and RS-232**
- **SG384 ... \$4,600 (U.S. list)**

Introducing the new SG384 4 GHz RF Signal Generator — finally, a high performance, affordable RF source.

The SG384 uses a unique, innovative architecture (Rational Approximation Frequency Synthesis) to deliver ultra-high frequency resolution (1 μ Hz), excellent phase noise, and versatile modulation capabilities (AM, FM, Φ M, pulse modulation and sweeps) at a fraction of the cost of competing designs.

The standard model SG384 produces sine waves from DC to 4.05 GHz. There is an optional frequency doubler (Opt. 02) that extends the frequency range to 8.10 GHz. Low-jitter differential clock outputs (Opt. 01) are available, and an external I/Q modulation input (Opt. 03) is also offered. For demanding applications, the SG384 can be ordered with a rubidium timebase (Opt. 04).

On the Front Panel

The SG384 has two front-panel outputs with overlapping frequency ranges. A BNC provides outputs from DC to 62.5 MHz with adjustable offsets and amplitudes from 1 mV to 1 Vrms into a 50 Ω load. An N-type output supplies frequencies from 950 kHz to 4.05 GHz with power from +13 dBm to -110 dBm (1 Vrms to 0.707 μ Vrms) into a 50 Ω load.



Ing. Prager Elektronik HandelsGmbH.

Traunstrasse 21 - A - 2120 Wolkersdorf - Tel: 0043 2245 6725 - Fax: 0043 2245 559 633 - office@prager-elektronik.at

Modulation

The SG384 offers a wide variety of modulation capabilities. Modes include amplitude modulation (AM), frequency modulation (FM), phase modulation (Φ M), and pulse modulation. There is an internal modulation source as well as an external modulation input. The internal modulation source produces sine, ramp, saw, square, and noise waveforms. An external modulation signal may be applied to the rear-panel modulation input. The internal modulation generator is available on the rear-panel modulation output.

Unlike traditional analog signal generators, the SG384 can sweep continuously from DC to 62.5 MHz. And for frequencies above 62.5 MHz, each sweep range covers more than an octave.

OCXO or Rubidium Timebase


The SG384 comes with a oven-controlled crystal oscillator (OCXO) timebase. The timebase uses a third-overtone stress-compensated 10 MHz resonator in a thermostatically controlled oven. The timebase provides very low phase noise and very low aging. An optional rubidium oscillator (Opt. 04) may be ordered to substantially reduce frequency aging and improve temperature stability.

The internal 10 MHz timebase (either the standard OCXO or the optional rubidium reference) is available on a rear-panel output. An external 10 MHz timebase reference may be supplied to the rear-panel timebase input.

Square Wave Clock Outputs


Optional differential clock outputs (Opt. 01) are available on the rear panel which make the SG384 a precision clock

Differential Clock Outputs

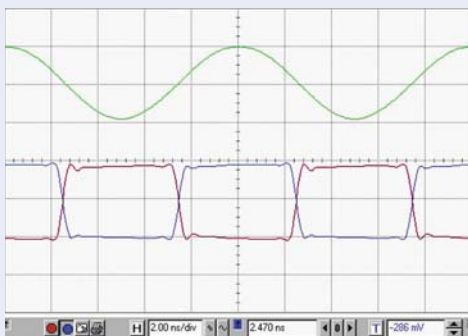

Option 01 provides differential clock outputs at rates from DC to 4.05 GHz with 1 μ Hz resolution. The clocks have transition times of about 35 ps. Both the offset and amplitude of the clock outputs can be adjusted for compliance with standard logic levels. Shown here at 2 ns/division; 100 MHz front panel sine wave output (top trace) and differential clock outputs (bottom traces). The displayed transition times are limited by the 1.5 GHz bandwidth of the oscilloscope.


SG384 Phase Noise vs. Offset Frequency

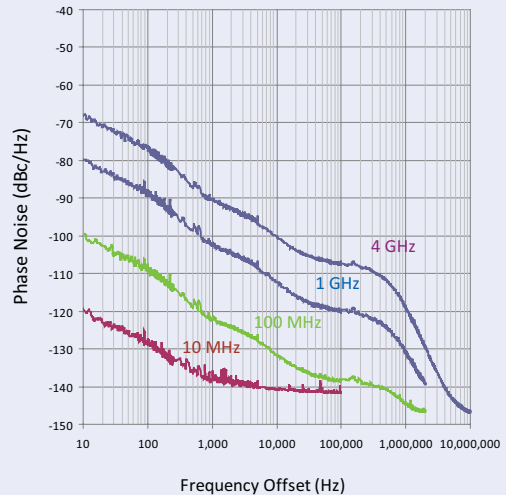

The SG384 always synthesizes a frequency in the top octave (2 GHz to 4 GHz) and digitally divides to generate outputs at lower frequencies. Doing so creates phase noise characteristics which scale with output frequency by 6 dB/octave or 20 dB/decade.

The low phase noise at small offsets (for example, -80 dBc/Hz at 10 Hz offset from 1 GHz) is attributable to the low phase noise OCXO timebase reference oscillator. An important figure of merit for communications applications is the phase noise at 20 kHz offset, which is about -116 dBc/Hz at 1 GHz.

Amplitude Modulation (100 %)

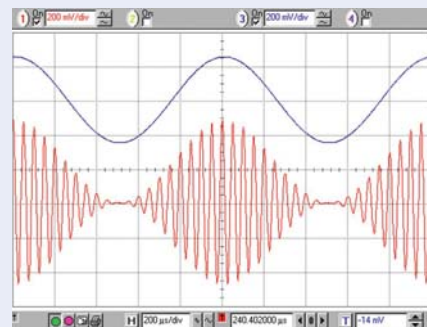

The frequency range of the SG384 extends from DC to 4 GHz. All of the analog modulation modes also extend to DC allowing the SG384 to perform function generator tasks. Shown here is a 20 kHz carrier being amplitude modulated by a 1 kHz sine.


Top trace: Modulation output
Bottom trace: Front-panel BNC output

generator in addition to a signal generator. Transition times are typically 35 ps, and both the offset and amplitudes of the clock outputs can be adjusted for compliance with PECL, ECL, RSECL, LVDS, CML, and NIM levels.

I/Q Inputs

Optional I/Q inputs (Opt. 03) allow I & Q baseband signals to modulate carriers from 400 MHz to 4.05 GHz. This option also allows the I/Q modulator to be driven by an internal noise generator with adjustable bandwidth. Rear-panel outputs allow the noise source to be viewed or used for other purposes.

I/Q Modulation of 1 GHz Carrier by Internal Noise Generator

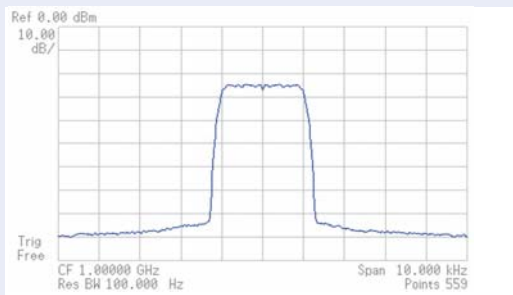

Option 03 allows I/Q modulation of carriers from 400 MHz to 4.05 GHz. Two signal sources may be used for I/Q modulation: external I & Q inputs or an internal noise generator. The external I & Q BNC inputs are on the rear panel. The internal noise generator has adjustable noise bandwidth. Shown here is a 1 GHz carrier being modulated by the internal noise generator with 1 kHz noise bandwidth.


Output Frequency Doubler

The SG384 can be ordered with a frequency doubler (Opt. 02) that generates signals from 4.05 GHz to 8.10 GHz. The amplitude of the rear-panel RF output can be adjusted from -15 dBm to +7 dBm. This option also comes with a bias source output which can be set with 5 mV resolution over ± 10 VDC.

Easy Communication


Remote operation of the SG384 is supported with GPIB, RS-232 and Ethernet interfaces. All instrument functions can be controlled and read over any of the interfaces. Up to nine instrument configurations can be saved in non-volatile memory.

Polar Plot of 1.000001 GHz Referenced to 1 GHz with 100 % AM at 5 kHz

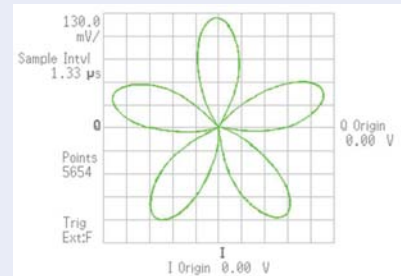

The polar plot shows the trajectory of a signal in the I/Q plane. An unmodulated carrier at the analyzer's reference frequency (1 GHz in this case) appears as a single dot in the I/Q plane. When the carrier frequency is offset, the single dot moves in a circle about the center of the I/Q plane. The pattern shown occurs when the carrier amplitude is modulated with 100 % depth at a rate of five times the carrier offset frequency (creating five lobes). The symmetry of the lobes indicates that there is no residual phase distortion (AM to Φ M conversion) in the amplitude modulator. The narrow line of the trajectory is indicative of low phase and amplitude noise.

Spectrum of Frequency Modulated 50 MHz Carrier

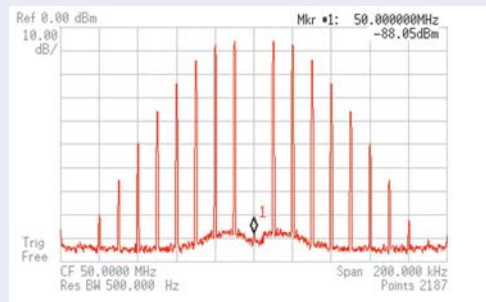


Outputs below 62.5 MHz are generated by direct-digital synthesis with a sample frequency of 1 GHz. In this example, a 50 MHz carrier is frequency modulated at a rate of 10 kHz and a deviation of 24.0477 kHz, for a modulation index $\beta = 2.40477$. The carrier amplitude is proportional to the Bessel function $J_0(\beta)$, which has its first zero at 2.40477.

A New Frequency Synthesis Technique


The SG384 is based on a new frequency synthesis technique called Rational Approximation Frequency Synthesis (RAFS). RAFS uses small integer divisors in a conventional phase-locked loop (PLL) to synthesize a frequency that would be close to the desired frequency (typically within ± 100 ppm) using the nominal PLL reference frequency. The PLL reference frequency, which is sourced by a voltage controlled crystal oscillator that is phase locked to a dithered direct digital synthesizer, is adjusted so that the PLL generates the exact frequency. Doing so provides a high phase comparison frequency (typically 25 MHz) yielding low phase noise while moving the PLL reference spurs far from the carrier where they can be easily removed. The end result is an agile RF source with low phase noise, essentially infinite frequency resolution, without the spurs of fractional-N synthesis or the cost of a YIG oscillator.

Unmodulated Spectrum of a 1 GHz Output

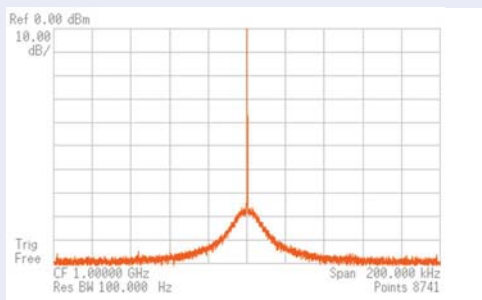

The SG384 output exhibits low phase noise and low spurious content. In this direct measurement taken with 100 Hz RBW, the noise floor of the spectrum analyzer dominates over most of the 200 kHz span.

FSK in the Time Domain

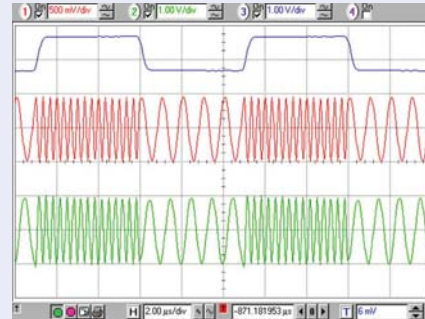

Frequency shift keying (FSK) can be used to transmit data. In this example, the internal modulator is set to FM between 1 MHz and 3 MHz with a 100 kHz square wave.

Top trace: Rear-panel modulation output
Middle trace: Front-panel BNC output
Bottom trace: Front-panel N-type output

Ordering Information

SG384	RF Signal Generator	\$4,600
Option 01	Rear-panel clock outputs (SMA)	\$750
Option 02	8 GHz doubler & DC bias	\$750
Option 03	External I/Q modulation	\$750
Option 04	Rubidium timebase	\$1500
RM2U-S	Single rack mount kit	\$100
RM2U-D	Dual rack mount kit	\$100



SG384 front panel



SG384 rear panel



Ing. Prager Elektronik HandelsGmbH.

Traunstrasse 21 - A - 2120 Wolkersdorf - Tel: 0043 2245 6725 - Fax: 0043 2245 559 633 - office@prager-elektronik.at

Frequency Setting

Frequency ranges	DC to 62.5 MHz (BNC output) 950 kHz to 4.05 GHz (N-type output) 4.05 GHz to 8.1 GHz (opt. 02)
Frequency resolution	1 μ Hz at any frequency
Switching speed	<8 ms (to within 1 ppm)
Frequency error	<(10 ⁻¹⁸ + timebase error) \times f_c
Frequency stability	1 \times 10 ⁻¹¹ (1 s Allan variance)

Front-Panel BNC Output

Frequency range	DC to 62.5 MHz
Amplitude	1.00 Vrms to 0.001 Vrms
Offset	\pm 1.5 VDC
Offset resolution	5 mV
Max. excursion	1.41 V (amplitude + offset)
Amplitude resolution	<1 %
Amplitude accuracy	\pm 5 %
Harmonics	<-40 dBc
Spurious	<-75 dBc
Output coupling	DC, 50 Ω \pm 2 %
User load	50 Ω
Reverse protection	\pm 5 VDC

Front-Panel N-Type Output

Frequency range	950 kHz to 4.05 GHz
Power output	+13 dBm to -110 dBm
Voltage output	1 Vrms to 0.7 μ Vrms
Power resolution	0.01 dBm
Power accuracy	\pm 1 dB
Output coupling	AC, 50 Ω
User load	50 Ω
VSWR	<1.6
Reverse protection	30 VDC, +25 dBm RF

Spectral Purity of the RF Output Referenced to 1 GHz*

Sub harmonics	None
Harmonics	<-25 dBc (<+7 dBm, N-type output)
Spurious	
<10 kHz offset	<-65 dBc
>10 kHz offset	<-75 dBc
Phase noise	
10 Hz offset	-80 dBc/Hz (typ.)
1 kHz offset	-102 dBc/Hz (typ.)
20 kHz offset	-116 dBc/Hz (typ.)
1 MHz offset	-130 dBc/Hz (typ.)
Residual FM (typ.)	1 Hz rms (300 Hz to 3 kHz BW)
Residual AM (typ.)	0.006 % rms (300 Hz to 3 kHz BW)

* Spurs, phase noise and residual FM scale by 6 dB/octave to other carrier frequencies

Phase Setting on Front-Panel Outputs

Max. phase step	\pm 360°
Phase resolution	0.01° (DC to 100 MHz) 0.1° (100 MHz to 1 GHz) 1.0° (1 GHz to 8.1 GHz)

Standard OCXO Timebase

Oscillator type	Oven controlled, 3 rd OT, SC-cut crystal
Stability (0 to 45 °C)	< \pm 0.002 ppm
Aging	< \pm 0.05 ppm/year

Rubidium Timebase (Opt. 04)

Oscillator type	Oven controlled, 3 rd OT, SC-cut crystal
Physics package	Rubidium vapor frequency discriminator
Stability (0 to 45 °C)	< \pm 0.0001 ppm
Aging	< \pm 0.001 ppm/year

Timebase Input

Frequency	10 MHz, \pm 2 ppm
Amplitude	0.5 to 4 Vpp (-2 dBm to +16 dBm)
Input impedance	50 Ω , AC coupled

Timebase Output

Frequency	10 MHz, sine
Source	50 Ω , DC transformer coupled
Amplitude	1.75 Vpp \pm 10 % (8.8 dBm \pm 1 dBm)

Internal Modulation Source

Waveforms	Sine, ramp, saw, square, pulse, noise
Sine THD	-80 dBc (typ. at 20 kHz)
Ramp linearity	<0.05 % (1 kHz)
Rate	1 μ Hz to 500 kHz (f_c < 62.5 MHz) 1 μ Hz to 50 kHz (f_c > 62.5 MHz)
Rate resolution	1 μ Hz
Rate error	1:2 ³¹ + timebase error
Noise function	White Gaussian noise (rms = dev / 5)
Noise bandwidth	1 μ Hz < ENBW < 50 kHz
Pulse generator period	1 μ s to 10 s
Pulse generator width	100 ns to 9999.9999 ms
Pulse timing resolution	5 ns
Pulse noise function	PRBS 2 ⁵ - 2 ¹⁹ . Bit period (200 + 5N) ns

Modulation Waveform Output

Output impedance	50 Ω (for reverse termination)
User load	Unterminated 50 Ω coax
AM, FM, Φ M	\pm 1 V for \pm full deviation
Pulse/Blank	"Low" = 0 V, "High" = 3.3 VDC

External Modulation Input

Modes	AM, FM, Φ M, Pulse, Blank
Unmodulated level	0 V input for unmodulated carrier
AM, FM, Φ M	\pm 1 V input for \pm full deviation
Modulation bandwidth	>100 kHz
Modulation distortion	<-60 dB
Input impedance	100 k Ω
Input offset	<500 μ V
Pulse/Blank threshold	+1 VDC



Ing. Prager Elektronik HandelsGmbH.

Traunstrasse 21 - A - 2120 Wolkersdorf - Tel: 0043 2245 6725 - Fax: 0043 2245 559 633 - office@prager-elektronik.at

Amplitude Modulation

Range	0 to 100 % (decreases above +7 dBm)
Resolution	0.1 %
Modulation source	Internal or external
Modulation distortion	
BNC output	<0.1 % ($f_C < 62.5$ MHz, $f_M = 1$ kHz)
N-type output	<3 % ($f_C < 62.5$ MHz, $f_M = 1$ kHz)
Modulation bandwidth	>100 kHz

Frequency Modulation

Frequency deviation	10 Hz to 1 MHz
Deviation resolution	Larger of 1 Hz or 0.1 % of deviation
Deviation accuracy	<0.1 % ($f_C < 62.5$ MHz)
	<3 % ($f_C > 62.5$ MHz)
Modulation source	Internal or external
Modulation distortion	<-70 dB ($f_C = 1$ GHz, $f_M = f_D = 20$ kHz)
Ext. FM carrier offset	<1:1,000 of deviation
Modulation bandwidth	>100 kHz

Frequency Sweeps (Phase Continuous)

Frequency span	10 Hz to entire sweep range
Sweep ranges	DC to 62.5 MHz
	59.375 MHz to 128.125 MHz
	118.75 MHz to 256.25 MHz
	237.5 MHz to 512.5 MHz
	475 MHz to 1025 MHz
	950 MHz to 2050 MHz
	1900 MHz to 4100 MHz
	3800 MHz to 8200 MHz (Opt. 02 only)
Deviation resolution	Larger of 1 Hz or 0.1 % of deviation
Sweep source	Internal or external
Sweep distortion	<0.1 Hz + (deviation / 1,000)
Sweep offset	<1:1,000 of deviation
Sweep function	Triangle or ramp sweeps up to 120 Hz

Phase Modulation

Deviation	0 to 360°
Deviation resolution	0.01° to 100 MHz
	0.1° to 1 GHz
	1° above 1 GHz
Deviation accuracy	<0.1 % ($f_C < 62.5$ MHz)
	<3 % ($f_C > 62.5$ MHz)
Modulation source	Internal or external
Modulation distortion	<-70 dB ($f_C = 1$ GHz, $f_M = \Phi_D = 20$ kHz)
Modulation bandwidth	>100 kHz

Pulse/Blank Modulation

Pulse mode	Logic "High" turns RF "on"
Blank mode	Logic "High" turns RF "off"
On/Off ratio	40 dB (1 GHz to 4 GHz)
	60 dB (100 MHz to 1 GHz)
	75 dB (DC to 100 MHz)
Pulse feed-through	10 % of carrier for 20 ns at turn on (typ.)
Turn on/off delay	60 ns
RF rise/fall time	20 ns
Modulation source	Internal or external pulse

External I/Q Modulation (Opt. 03)

Carrier frequency range	400 MHz to 4.05 GHz
Modulated output	Front-panel N-type only
I/Q inputs	50 Ω , ± 0.5 V
I or Q input offset	<500 μ V
I/Q full scale	$(I^2 + Q^2)^{1/2} = 0.5$ V
Carrier suppression	>40 dBc
Modulation bandwidth	200 MHz (-3 dB)

Square Wave Clock Outputs (Opt. 01)

Differential clocks	Rear-panel SMAs drive 50 Ω loads
Frequency range	DC to 4.05 GHz
Transition time (typ.)	<35 ps (20 % to 80 %)
Jitter	
$f_C > 62.5$ MHz	<300 fs rms (1 kHz to 5 MHz BW)
$f_C < 62.5$ MHz	<10 ⁻⁴ U.I. rms (1 kHz to 5 MHz BW)
Amplitude	0.4 V _{pp} to 1 V _{pp}
Offset	± 2 VDC
Ampl/offset resolution	5 mV
Ampl/offset accuracy	± 5 %
Output coupling	DC, 50 $\Omega \pm 2$ %
Compliance	ECL, PECL, RSECL, CML, LVDS, NIM

Frequency Doubler Output (Opt. 02)

Output	Rear-panel SMA
Frequency range	4.05 GHz to 8.10 GHz
RF amplitude	-15 dBm to +7 dBm
Sub harmonic ($f_C/2$)	<-25 dBc
Mixing products ($3f_C/2$)	<-25 dBc
Harmonics ($n \times f_C$)	<-25 dBc
Spurious (8 GHz)	<-55 dBc (>10 kHz offset)
Phase noise (8 GHz)	-98 dBc/Hz at 20 kHz offset (typ.)
Amplitude resolution	0.01 dBm
Amplitude accuracy	± 1 dB
Modulation modes	FM, Φ M, sweeps
Output coupling	AC, 50 Ω
Reverse protection	30 VDC, +25 dBm RF

DC Bias Source (comes with Opt. 02)

Output	Rear-panel SMA
Voltage range	± 10 V
Offset voltage	<20 mV
DC accuracy	± 0.2 %
DC resolution	5 mV
Output resistance	50 Ω
Current limit	20 mA

Computer Interfaces

Ethernet (LAN)	10/100 Base-T.TCP/IP & DHCP default
GPIB	IEEE488.2
RS-232	4800 to 115,200 baud, RTS/CTS flow

General

Line power	<90 W, 90 to 264 VAC, 47 to 63 Hz w/ PFC
Dimensions, weight	8.5" \times 3.5" \times 13" (WHD), 10 lbs.
Warranty	One year parts and labor

