

## FlawHunter NDT System

Laser Shearography NDT System for fast & reliable inspection of large, sandwich, honeycomb, composite laminate, and bonded components



### Portable NDT Solution for in-field (service) NDT and quality control (post-production) operations

The FlawHunter is an integrated NDT inspection device, equipped with an advanced, high-resolution Laser Shearography sensor with a vacuum (partial) excitation system. Designed as a completely compact, stand-alone system, the FlawHunter can be used by one NDT technician or operator.

It is ergonomic & easy-to-use and is equipped with a workflow-oriented, GUI-display and left/right-hand button control. The FlawHunter can be used on any material & surface provided a stable vacuum can be generated within the vacuum seal (viewable inspection area).

### Key benefits

- Light & convenient system weighing only 9 kgs (20 lbs)
- Ergonomic & easy to handle with two (left- & right-hand), +/- 45° adjustable tilt handles
- Can inspect 320 mm x 230 mm (12.6 " x 9 ") within a maximum of 10 seconds
- Safe to use system with laser safety Class 1.
- Fully integrated control electronics with no external connections
- Single-/Multi-Step measurement acquisition workflow via the trigger button operation
- Uses the 4+4 Phase Shifting technique removing measurement noise.
- Multiple vacuum frame seals available



*FlawHunter Laser Shearography NDT System*



*FlawHunter being used on a CFRP Laminates/Sandwich Component indicating localized impact damage and voids.*

**Sub-micrometer, measurement resolution**

Laser Shearography is an optical, Non-Destructive Testing (NDT) technique used to reveal sub-surface defects in structures. This technique works through the application of a load to a structure for which a laser shearography sensor observes (minimal) surface bending in the form of an out-of-plane strain field, and subsequently images the measurement as a phase map.

Since the sensor is sensitive to changes in the interference of laser light, the capability of the sensor to detect bending is within the sub-micrometer range. The ultimate goal of any NDT system is to deliver reliable measurement results as economically as possible. Laser Shearography is a perfect solution that can detect defects that other NDT methods cannot, including disbonds, kissing bonds, node bond splits, and ply wrinkling. In many cases the reliability of the technique, as quantified through the smallest detectable defect size at 90% Probability of Detection (PoD) and low False Call Rates is unmatched.

The economic advantages of using Laser Shearography include high inspection rates (i.e. m<sup>2</sup>/sec), low sample preparation times, and formal NDT technique approval & recognition.

The best applications suited for the FlawHunter are large-bodied components made from honeycomb, sandwich, composite laminate, or bonded/coating (cross-section) constructions.




*Applicable NDT Applications for Laser Shearography*




*FlawHunter being used on a CFRP Laminate/Sandwich Component.*



*FlawHunter being used on an Aluminium Sandwich Component.*

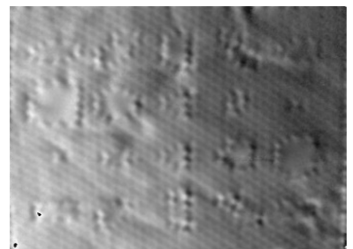


*Phase Map of an Alu. Honeycomb Comp using the FlawHunter. (Marine NDT)*

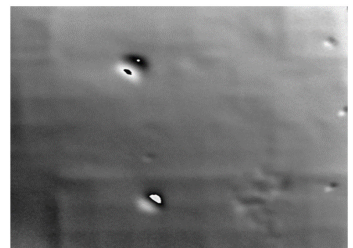

*Phase Map of a Sandwich Comp using the FlawHunter. (Marine NDT)*

**A workhorse for efficient & fast NDT inspection**


The FlawHunter can inspect 320 mm x 230 mm (12.6 " x 9 ") within a maximum of 10 seconds (including; placement, clamping & measurement), yielding an inspection rate of 0.44 m<sup>2</sup>/min (4.7 ft<sup>2</sup>/min)! The vacuum pump typically requires 3-5 seconds to reach a steady vacuum level. Using the 4+4 Phase Shifting technique in conjunction with stable vacuum control via the integrated vacuum pump & controller, users can set the vacuum (pressure) level down to -11 kPa with a tolerance of +/- 0.05 kPa. The result yields measurement images with the best definition and clarity with minimal noise.

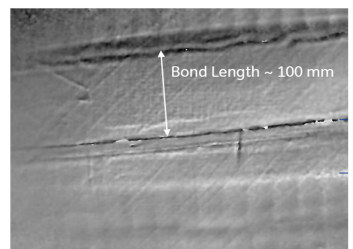


*Phase Map of the Bondline Length of a TE Section using the FlawHunter. (Wind Power NDT)*



*View of FlawHunter from underneath, showing a sealed area (Field-of-View) and two laser diodes.*




*FlawHunter being used on a CFRP Laminate Component.*

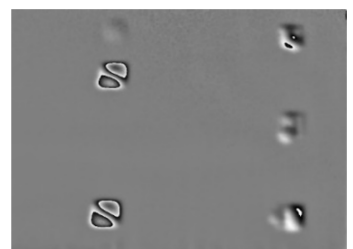


*Phase Map of an Alu. Honeycomb Comp. using the FlawHunter. (Aerospace NDT)*

## Easy operation via workflow-oriented trigger buttons


The FlawHunter is equipped with two buttons on either handle (left & right). A grey trigger button (L1/R1) is operated using the thumb and the (L2/R2) trigger button is operated using the 3rd (middle) finger. With two (left- & right-hand), +/- 45° adjustable tilt handles and a ball-socket Tablet PC connection, the FlawHunter can be easily handled by operators to inspect any (accessibly difficult) surface.

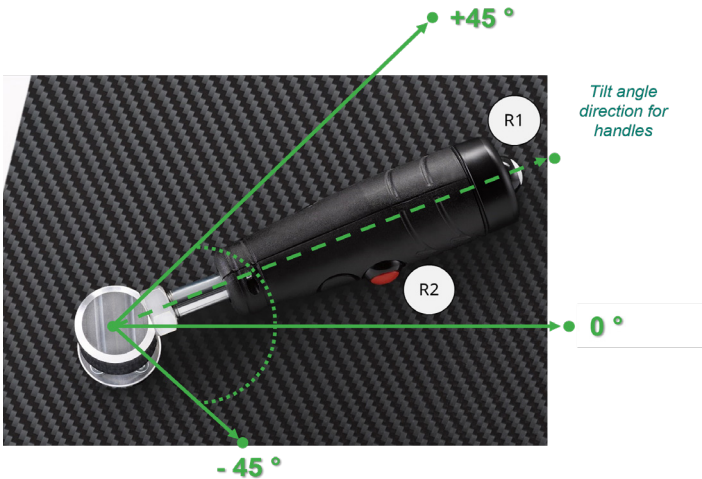

Tilt angle direction for handles

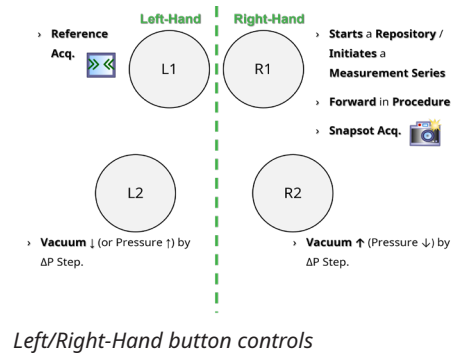


Left/Right-Hand button controls



FlawHunter Laser Shearography NDT System

Using the FlawHunter Laser Shearography NDT System users can perform two types of measurement modes: single-/multi-step measurement mode (standard) and manual measurement mode.

The single-/multi-step GUI acquisition mode, as known from the Q-810, is combined in one mode in the FlawHunter. Users can use pre-selected pressure steps and take reference & snapshot measurements.

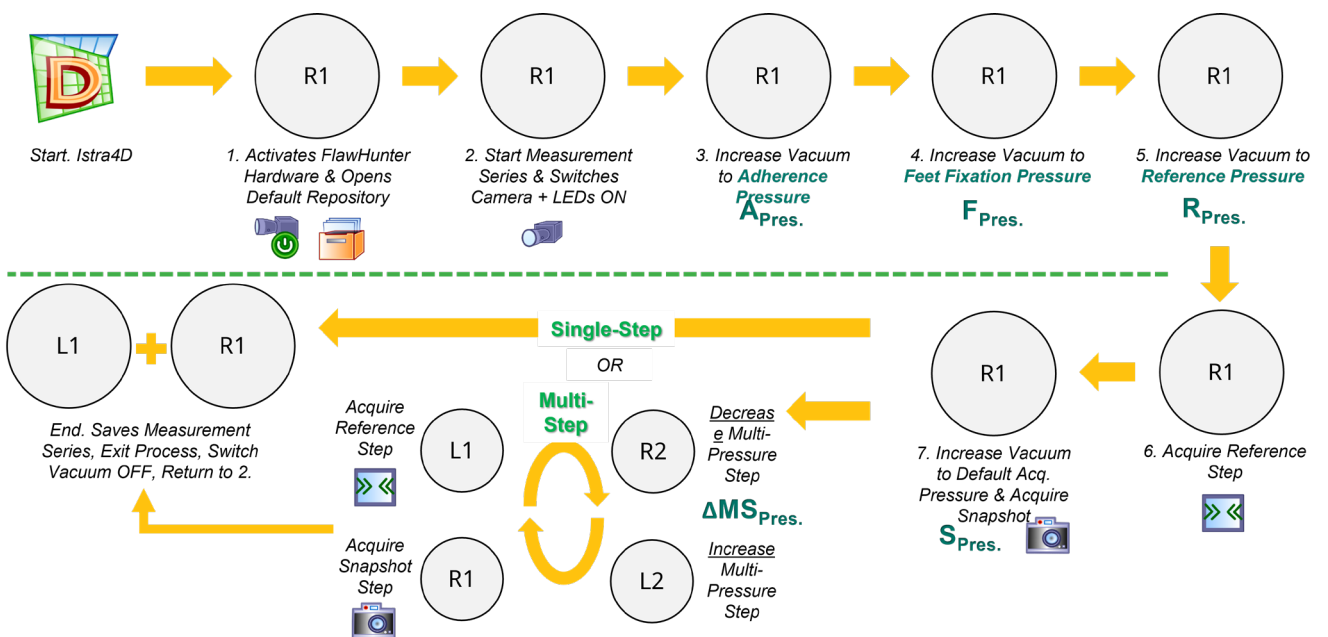

Single/multi-step GUI acquisition mode workflow

## NDT applications

<p><b>Aerospace NDT Webinar: Coatings &amp; Feltmetal Seals – Video</b></p>  <p><b>Aerospace NDT – Coatings &amp; Feltmetal Seals: An Overview</b></p> <p>Application #A: Coatings Cork/CFRP Application #B: Coatings Cork/Metal Application #C: Coatings Cork/Metal Application #D: Coatings Cork/CFRP Laminate Application #E: Coatings Rubber/Metal Application #F: Feltmetal Seals Compressor</p>	<p><b>Aerospace NDT Webinar: Rotor Blades – Video</b></p>  <p><b>Aerospace NDT – Rotor Blades: An Overview</b></p> <p>Application #A: Tail Rotor Blade Aluminum Honeycomb Application #B: Tail Rotor Blade Aluminum Honeycomb Application #C: Main Rotor Blade Aluminum Honeycomb</p>	<p><b>Aerospace NDT Webinar: Nacelles, Cowlings, Fairings &amp; Radomes – Video</b></p>  <p><b>Aerospace NDT – Nacelles, Cowlings, Fairings &amp; Radomes: An Overview</b></p> <p>Application #A: Nacelle/Cowling Aramid Honeycomb Application #B: Nacelle/Cowling Aluminum Honeycomb Application #C: Radome CFRP/FRP Honeycomb Application #D: Aluminum Skins Aluminum Honeycomb Application #E: Radome ASFP Honeycomb Application #F: Fairing ASFP Honeycomb</p>
<p><b>Aerospace NDT Webinar: Control Surfaces &amp; Satellite Solar Arrays – Video</b></p>  <p><b>Aerospace NDT – Control Surfaces &amp; Satellite Solar Arrays: An Overview</b></p> <p>Application #A: Control Surfaces Aluminum Honeycomb Application #B: Control Surfaces Aluminum Honeycomb Application #C: Control Surfaces Aluminum Honeycomb Application #D: Control Surfaces Foam-Core Sandwich Application #E: Control Surfaces Foam-Core Sandwich Application #F: CFRP Aluminum Honeycomb Application #G: CFRP Aluminum Honeycomb Application #H: Control Surfaces CFRP Aerial</p>	<p><b>Marine NDT Webinar: Hulls &amp; Rudders - Video</b></p>  <p><b>Laser Shearography Applications: Marine NDT Applications - An Overview (I)</b></p> <p>Application #A: Hull: CFRP Skin / Double Foam-Core Sandwich Application #B: Hull: CFRP Skin / Foam-Core Sandwich 1 Application #C: Hull: CFRP Skin / Foam-Core Sandwich 2 Application #D: Hull: CFRP Skin / Foam-Core / CFRP Integral Backing Application #E: Hull: CFRP Skin / Kevlar Honeycomb Application #F: Hull Panel – Aluminum Skin / Aluminum Honeycomb Application #G: Hull: CMI Disbonding (Skin-to-Core) Application #H: Rubber: CMI Bondline Investigation</p>	<p><b>Wind Power NDT Webinar: Rotor Blades – Video</b></p>  <p><b>Wind Power – Rotor Blade NDT Laser Shearography Applications: Wind Power NDT: An Overview</b></p> <p>Application #A: Spar Cap By Welding Application #B: Loading Edge (LEP) Disbonding Application #C: Trailing Edge Crested Core Application #D: Trailing Edge Disbonding Application #E: Impact Damage Hollowing Application #F: Trailing Edge Impact Damage Lifting Strips Application #G: Spar Cap Bondline (Disbonding) Application #H: Loading/Trailing Edge Bondline Length Inspection</p>

## Customer Service & Support Benefits



1-year free software updates with technical support (E-mail/phone)



Unlimited access for an unlimited amount of users to the LS user training module via the Dantec eLearning platform.



1-year warranty (standard)



Access to a yearly servicing package at a fixed price, including Istra4D software upgrades



Online help/support using Teamviewer™ for application assistance and running troubleshooting diagnostics online (if needed).



Dantec Dynamics works closely with accredited NDT training and servicing providers for Laser Shearography NDT. Our primary training partner, Testia®, an Airbus® company, offers LS training to EN 4179 at Bristol in the UK. Certification can also be completed on location.

## Technical specifications

Specifications	
Dimensions	380 mm x 430 mm x 400-500 mm* (15" x 17" x 15.7"-19.7"*)
Weight	9 kg (20 lbs)
Field-of-View (FoV)	32 cm x 23 cm (12.6" x 9")
Inspection Rate	0.44 m <sup>2</sup> /min** (4.7 ft <sup>2</sup> /min**)
Camera	3.2 MPx / 37 Hz (standard) or 5 MPx / 24 Hz (optional) 12-bit CMOS camera
Shearing Sensor	SW-controllable shearing piezo (shear angle and shear distance) Phase-stepping piezo
Laser Unit	2 laser diodes 120mW (CW) @ 660nm
Laser class	Class 1 DIN EN 60825-1:2007 IEC 60825-1:2007 ANSI Z136.1-2014
Tablet PC	Display (13") / 3:2 / 2880 x 1920 Intel® Core™ i7 RAM: 16 GB SSD: 512 GB

(\*) Depending on Tablet PC Angle

(\*\*) Assuming max. 10 seconds for placement, clamping & measurement

## Order information

Category	Item	Item no
FlawHunter	FlawHunter Laser Shearography NDT System - Tablet PC + Stylus	DSM 83000
Vacuum Frame Seals		
Curved Seal (Side R = 110 cm) (Exchangeable)		DSM 84010
Curved Seal (Side R = 115 cm) (Exchangeable)		DSM 84020
Docking Station	FlawHunter Office Docking System	DSM 83050



Traunstraße 21, A-2120 Wolkersdorf  
T: +43 2245 6725 F: +43 2245 559633  
office@prager-elektronik.at  
www.prager-elektronik.at



Solution Sheet DS\_0811\_v2. Subject to change without notice. Copyright © 2022.  
Dantec Dynamics. All Rights Reserved. www.dantecdynamics.com